


Product specifications:

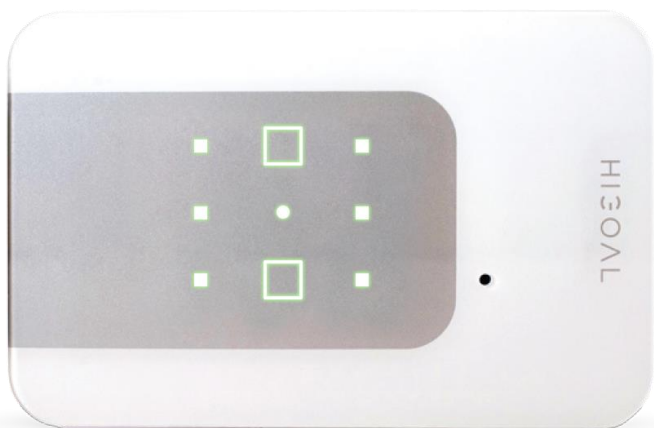

Dry contact: 8 input

IR SENSOR: Built-in

Mini speaker: Built-in

Rated Voltage: AC 110-230V, 50/60 Hz

Standby current: 60ma

Updates: Firmware Over The Air (FOTA)

Front panel:

- 1.5 mm glass cover
- 8 operating buttons + 1 function button
- RGB LED indicator for each button

LED indicator: Different color indicator for each operating mode

Operating frequency: 2400-2483 MHz

Transmission power: 0.04w

Transmission bandwidth: 20 MHz

Modulation: DSSS, CKK, OFDM

Weight: 0.167 KG

Energy metering range: 50-3600w

Outputs: 2 x 10A (each) or 1 x 16A

Options:

- 8 operations buttons:
 - 2 programmable outputs
 - 6 for additional functions (Scenario, Duplicate)
- 2 On/Off
- 8 dry contacts, parallel to the operations buttons

